


MISTAWAY MA1200 FILTER SETUP

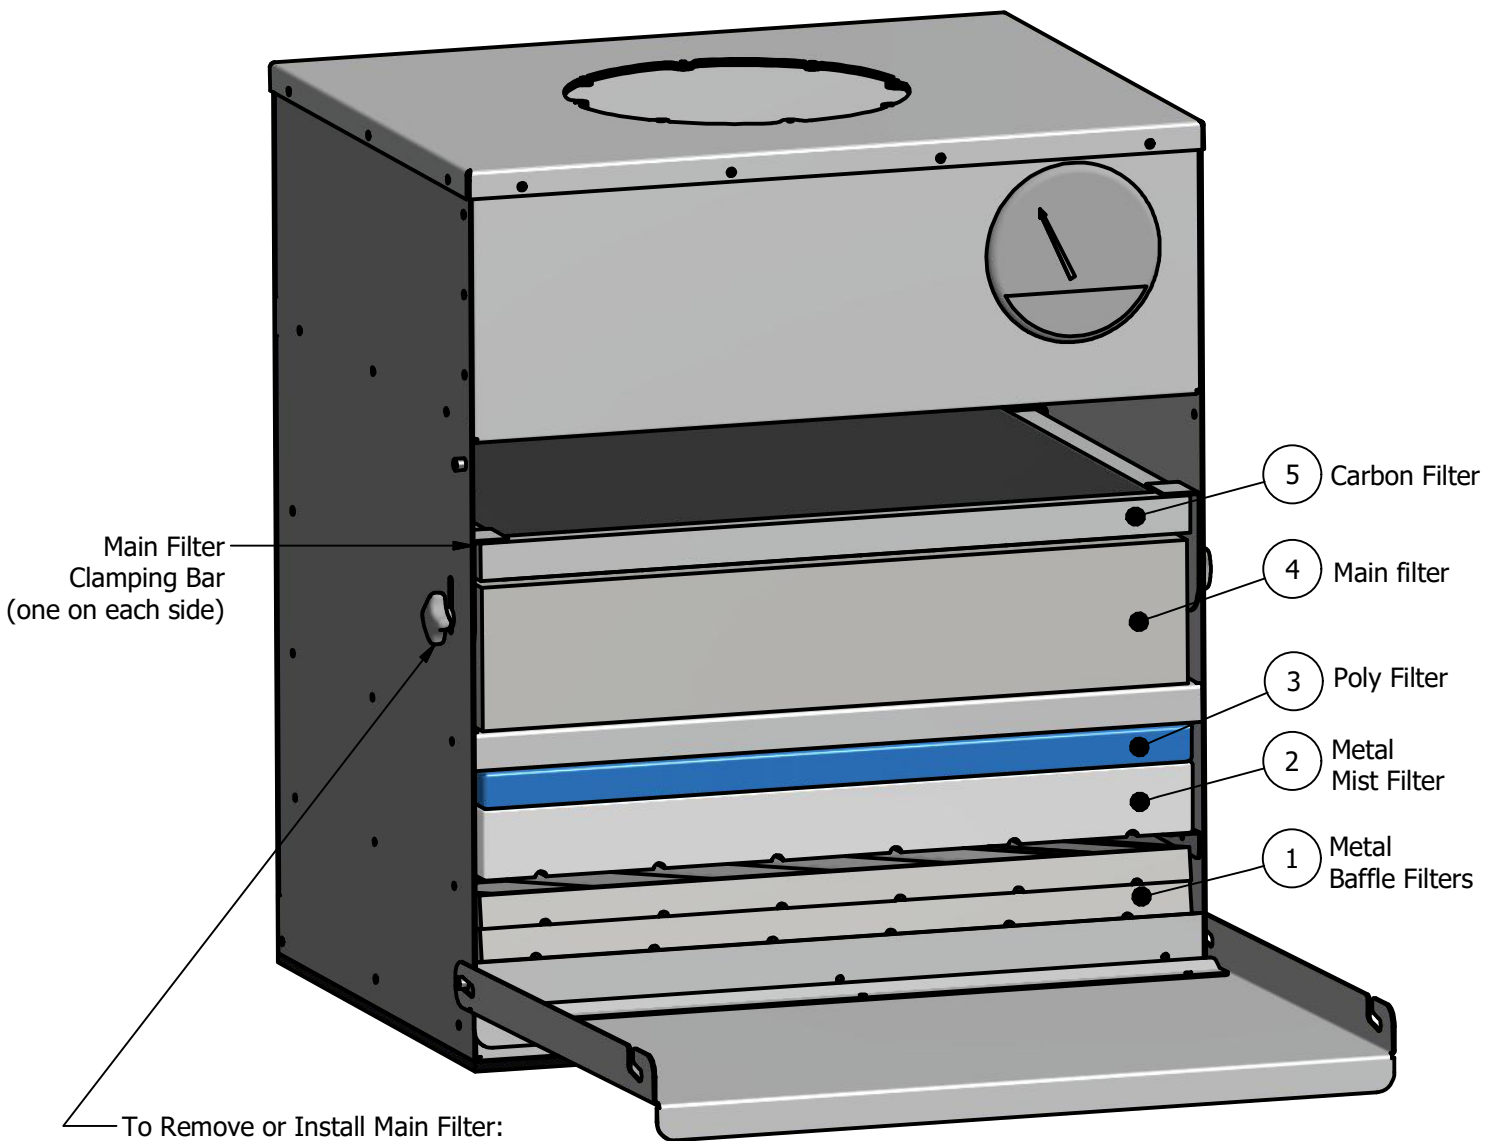

To Remove or Install Main Filter:

- 1) Loosen Knob on each side of Mistaway
 - 2) Raise Clamping Bars to release Main Filter or lower Clamping Bars to clamp Main Filter in place
- (Tighten knobs while holding downward pressure on clamping bars)**

FILTER PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	1200-01	20" x 25" x 1" Metal Baffle Filter (drain holes down)
2	1	1200-02	20" x 25" x 2" Metal Mist Separating Filter (drain holes down)
3	1	1200-03	20" x 25" x 1" Polyester Filter
4	1	1200-04	20" x 25" x 4" Merv 14 ASHRAE Filter
5	1	1200-05	20" x 25" x 1" Carbon Filter (metal frame with two carbon pads)

Caution: Edges of metal filters are SHARP!

Wear gloves when handling or changing metal filters.

Note: After Filter option is recommended in applications where smoke is created in the machining process.