


# MISTAWAY MA400 FILTER SETUP

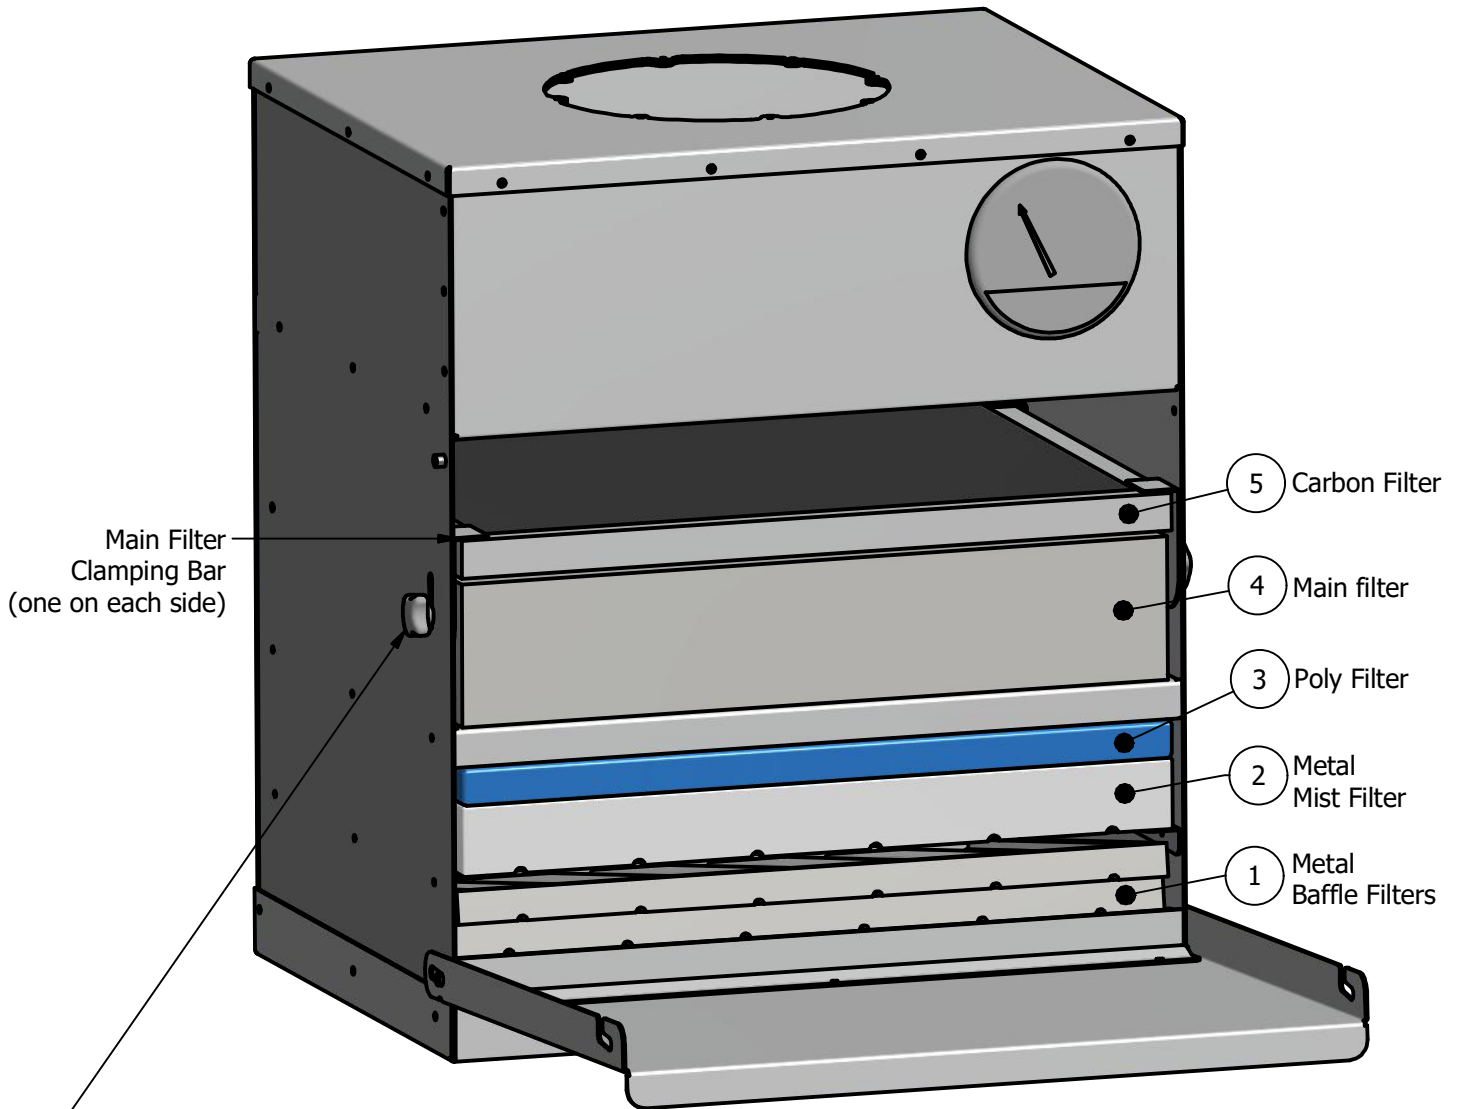

To Remove or Install Main Filter:

- 1) Loosen Knob on each side of Mistaway
- 2) Raise Clamping Bars to release Main Filter or Lower Clamping Bars to clamp Main Filter in place  
**(Tighten Knobs while holding downward pressure on Clamping Bars)**

FILTER PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	400-01	12" x 16" x 1" Metal Baffle Filter (drain holes down)
2	1	400-02	12" x 16" x 2" Metal Mist Filter
3	1	400-03	12" x 16" x 1" Polyester Filter
4	1	400-04	12" x 16" x 4" Merv 14 ASHRAE Filter
5	1	400-05	12" x 16" x 1" Carbon Filter (metal frame with two carbon pads)

Caution: Edges of metal filters are SHARP!  
Wear gloves when handling or changing metal filters.

Note: After Filter Option is recommended in applications where smoke is created in the machining process.